


Acro Building Systems
Johnny Jack Fixed Bracket User Guide
Model #19700 – Johnny Jack

Refer Question to:
info@acrobuildingsystems.com
800-267-3807
www.acrobuildingsystems.com

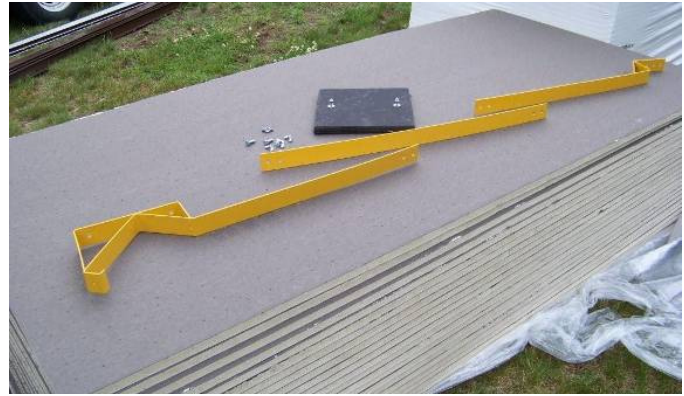

Warning: Failure to follow instructions for the use of this product can result in serious personal injury.

19700 Johnny Jack Fixed Roof Bracket Instructions:

General: 1) Only for use on roofs. 2) Always use fall protection in accordance with local, state and federal OSHA regulations. 2) Max roof pitch is 12/12. 3) Not an anchor point. 5) Roof Brackets are meant for use by experienced tradesmen having full knowledge in its use. 6) OSHA regulations require that employer provide training in the use and care of this product.

Mounting the 19700: 1) Brackets shall be attached to the roof with 3/8 x 31/8 to 4” structural screw such as GRK RSStm, timber lock or equivalent type fasteners, using all three (3) attachment holes on jack tongue. 2) Brackets to be placed so fasteners penetrate roof decking and into an underlying structural framing member. 3) Spacing of roof brackets shall not exceed 8 feet on center.

Capacity: 300 lbs. Maximum per pair

Instructions for Use of 19700: 1) 2 Inch nominal wood platforms used shall be in compliance with national forest products paragraph 5 of ANSI A10.8-1988 scaffolding safety requirements published by the NATIONAL SAFETY STANDARDS INSTITUTE. 2) Platforms should be installed so as to extend beyond the support arm of the roof brackets not less than 6 inches or more than 12 inches. 3) Attach the wood platform to the bracket by screwing or nailing the platform to the bracket by using 1/4” hole provided on the front of the support arm of all roof brackets. 4) If extended platforms are required, utilize additional Johnny jacks spaced no more than 8 feet apart.

Care and Maintenance of 19700: 1) Inspect all equipment before and after each use to be sure that there is no damage or deformation to any of the equipment. 2) Inspect to be sure there is no deterioration as a result of rusting. Discard if necessary. 3) Always handle the equipment with care to ensure safe and lasting use. 4) Do not throw or drop any equipment from height. 5) Do not use if exposed to extreme heat or cold. Discard at once. 6) Do not use if wet or frozen.

Made in the USA
Acro Building Systems Inc.
Acro Metal Stamping Inc.
Milwaukee, WI
ISO 9001:2008
Since 1942

<u>MDL#</u>	<u>PRODUCT</u>
19700	Johnny Jack Bracket

Updated 3/30/12